

02/09/99

1525 U.S. PTO

Please type a plus sign (+) inside this box → ☐PTO/SB/05 (12/97)
Approved for use through 09/30/00. OMB 0651-0032

Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number

**UTILITY
PATENT APPLICATION
TRANSMITTAL**

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No.

044557.0000

First Named Inventor or Application Identifier

Paul Pazandak

Title

TYPE-SPECIFIC OBJECTS FROM MARKUP AND WEB-
ORIENTED LANGUAGES, AND SYSTEMS AND METHODS
THEREFOR

Express Mail Label No.

EJ057893844US

APPLICATION ELEMENTS

See MPEP Chapter 600 concerning utility patent application contents

ADDRESS TO:Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

1. ☒ Fee Transmittal Form (e.g., PTO/SB/17)
(Submit an original, and a duplicate for fee processing)
2. ☒ Specification [Total Pages]
(preferred arrangement set forth below)
- Descriptive title of the Invention
- Cross References to Related Applications
- Statement Regarding Fed sponsored R&D
- Reference to Microfiche Appendix
- Background of the Invention
- Brief Summary of the Invention
- Brief Description of the Drawings (if filed)
- Detailed Description
- Claim(s)
- Abstract of the Disclosure
3. ☒ Drawing(s) (35 USC d113) [Total Sheets]
4. Oath or Declaration [Total Pages]
a. ☐ Newly Executed (original or copy)
b. ☐ Copy from a prior application (37 CFR §1.63(d))
(for continuation/divisional with Box 17 completed)
[Note Box 5 below]
i. ☐ DELETION OF INVENTOR(S)
Signed statement attached deleting inventor(s)
named in the prior application,
see 37 CFR §1.63(d)(2) and 1.33(b).
5. ☐ Incorporation By Reference (useable if Box 4b is checked)
The entire disclosure of the prior application, from which a copy of
the oath or declaration is supplied under Box 4b, is considered as
being part of the disclosure of the accompanying application and is
hereby incorporated by reference therein.

6. ☐ Microfiche Computer Program (Appendix)
7. Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)
a. ☐ Computer Readable Copy
b. ☐ Paper Copy (identical to computer copy)
c. ☐ Statement verifying identical of above copies

ACCOMPANYING APPLICATION PARTS

8. ☐ Assignment Papers (cover sheet & Documents(s))
9. ☐ 37 CFR §3.73(b) Statement [] Power of Attorney
(when there is an assignee)
10. ☐ English Translation Document (if applicable)
11. ☐ Information Disclosure [] Copies of IDS
Statement (IDS)/PTO-1449 Citations
12. ☐ Preliminary Amendment
13. ☐ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)
14. ☐ Small Entity [] Statement filed in prior application
Statement(s) Status still proper and desired
(PTO/SB/09-12)
15. ☐ Certified Copy of Priority Document(s)
if foreign priority is claimed
16. ☐ Other:

*A new statement is required to be entitled to pay small entity fees, except
where one has been filed in a prior application and is being relied upon

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information below and in a preliminary amendment:

☐ Continuation☐ Divisional☐ Continuation-in-part (CIP)

of prior application No: /

Prior application information: Examiner

Group / Art Unit:

18. CORRESPONDENCE ADDRESS

Customer Number or Bar Code Label

(Insert Customer No. or Attach bar code label here)



Correspondence address below

NAME	H. Dale Langley, Jr.		
ADDRESS	Akin, Gump, Strauss, Hauer & Feld, L.L.P., 816 Congress Avenue, Suite 1900		
CITY	Austin	STATE	Texas
COUNTRY	USA	TELEPHONE	512-499-6200
		ZIP CODE	78701
		FAX	512-499-6290

Name (Print/Type)	H. Dale Langley, Jr.	Registration No. (Attorney/Agent)	35,927
Signature	<i>H. Dale Langley, Jr.</i>	Date	2-9-99

Borden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231

PATENT APPLICATION

Docket No. 044557.0000

CERTIFICATE OF MAILING BY "EXPRESS MAIL"	
"Express Mail" Mailing Label Number	<u>EJ057893844 US</u>
Date of Deposit	<u>February 9, 1999</u>
I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to:	
Assistant Commissioner for Patents, Box Patent Application, Washington, D.C. 20231	
<u>Stacey M. Jamail</u>	
Stacey M. Jamail	

**TYPE-SPECIFIC OBJECTS FROM MARKUP AND WEB-ORIENTED
LANGUAGES, AND SYSTEMS AND METHODS THEREFOR**

Inventors: Paul Pazandak
809 East 102nd Street
Bloomington, Minnesota 55420-5409

AKIN, GUMP, STRAUSS, HAUER, & FELD, L.L.P.
1900 Frost Bank Plaza
816 Congress Avenue
Austin, Texas 78701
Telephone: (512) 499-6200
Telecopier: (512) 499-6290

CERTIFICATE OF MAILING BY "EXPRESS MAIL"
"Express Mail" Mailing Label Number EJ057893844 US
Date of Deposit January 9, 1999
I hereby certify that this paper ~~of~~ fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to:
Assistant Commissioner for Patents, Box Patent Application, Washington, D.C. 20231

Stacey M. Jamail
Stacey M. Jamail

TYPE-SPECIFIC OBJECTS FROM MARKUP AND WEB-ORIENTED LANGUAGES, AND SYSTEMS AND METHODS THEREFOR

5

Background of the Invention

The present invention generally relates to parser instantiation of objects in computer software programming and, more particularly, relates to parsing of Markup Language documents to produce application-specific (also referred to as "type-specific") objects in an Object-oriented Programming Language (OOPL), for example, parsing
10 Extensible Markup Language (XML) documents to produce instantiated application-specific Java objects.

A "parser" is a computer program that receives input in the form of sequential source program instructions, interactive online commands, markup tags, or some other defined interface and breaks that input into parts, e.g., objects and attributes, that can be
15 managed by other programming. Typically, a parser is part of a compiler which converts human readable software instructions into machine readable forms, for example, software source code into object code. Compilers usually first parse all of the human readable language statement instructions syntactically one after the other and then, in one or more successive passes, build output machine readable code, making sure that statements that
20 refer to other statements are referenced correctly in the final machine code.

A variety of parsers and parsing methods are known to those skilled in the art.

These parsers and methods are largely programming language specific and function according to any of several conventional parsing schemes. In order for conventional parser operation to be possible, the language instructions or other input to the parser must
5 comprise language characteristics or other elements distinguishable to the parser, as to which the parser may respond with break up of the input in desired manner for use in other applications. As can be readily understood, then, if input instructions do not contain such distinguishable elements, parsing could not be possible.

The parsing effects or results which may be achieved in any instance are similarly
10 dependent upon the elements of the input instructions which are distinguishable to the parser. If the input instructions contain only limited variability of distinction in the elements read by the parser, the parsing results will be limited to some categorization or arrangement consistent with the limitations in the variability. That is, if the parser only generically distinguishes between objects and attributes of a set of programming language
15 instructions being parsed, then the parser results (regardless of the parser schema) will only reflect those three levels of distinction.

With the widespread adoption of object-oriented programming and programming languages, it is now possible with such programming and languages to define objects and their related characteristics in a wide variety of manners, as best suits the need of the
20 programming environment and application. In general, the objects in such instances are the things you think about first in designing a program and they are also the units of code that are eventually derived from the process. In between, each object is made into a typed class of object and even super-typed classes are defined so that objects can share models

and reuse the class definitions in their code. Each object is an instance of a particular class or subclass with the class's own methods or procedures and data variables. Within each of these levels, i.e., object, class, subclass, methods, and data variables, distinction and even additional levels of distinction are possible. Thus, parsing of descriptions of object-oriented features can provide highly categorized and classified levels and characteristics of distinction for use in further operations. Such parsing provides many advantages, as those skilled in the art will know and appreciate.

XML documents may themselves be considered as objects, for example, in the sense that application-specific behaviors can be associated with the XML data structure consistent with standard object-oriented programming principles. Conventional XML parsers provide the ability to parse XML documents describing XML objects. (As used herein in certain instances, references to XML objects, XML documents, XML files or XML are all intended to and should be construed as referring to any and all data or information conforming to XML standards.) These parsers, however, can only generate a generic object structure (i.e., a "parse tree") representing a generic structuring of the object that was parsed (i.e., the structure of the XML document, in this case), without taking into account, for example, any behavior or structure that could have been originally associated with data contained in the XML object. The references to generic classes and objects herein have specific meanings. All conventional parsers have a set of classes that are used to instantiate XML. The classes so instantiated by conventional parsers, e.g., typically "Element" class and "Attribute" class only, are what are referred to herein as generic classes. These generic classes will not change based on the particular content of the XML. (Later herein, references are made to type-specific classes and

objects, which are distinguished from generic classes and objects. Type-specific classes are any and all classes that are not merely generic classes, e.g., type-specific classes include, without limitation, Java™ classes, C++ classes, smalltalk classes, CLOS classes, other object-oriented programming language classes, and different types of classes within
 5 each such language and combination of and among those classes.)

In essence, when the conventional XML parser encounters an XML element declaration, it merely instantiates a generic “Element” object. A result of a parse of an exemplary XML document may therefore be envisioned, for example purposes, as follows:

10

```

root  |-> Element |-> Element |-> Element
      |         |-> Element
      |         |-> Element |-> Element
      |
      |-> Element |-> Element { |-> Element }*
      |         |-> Element { |-> Element }*
      |         |-> Element { |-> Element }*
      |         |-> Element { |-> Element }*
  
```

15

20 The resulting tree is a composition of generic Element objects having no structure or behavior specific to the XML object. With the conventional parse of an XML document, therefore, every single application of an XML document will need to supply its own code to understand how to navigate and interpret the generic Element structure, and possibly provide behavior for each Element. Thus, object-oriented concepts, in conventional
 25 XML document scenarios, are not possible.

Without any associated behaviors, the data found in the parse tree from parsing of the XML document can only be accessed by an application in one of two ways: (1) the

application could traverse the tree structure node by node, extracting out and consuming the data as it progresses along the tree; or (2) the application could copy the data out of the generic tree structure and place it into a second, application-specific object structure containing associated behaviors—thereafter directly accessing the replicated data directly in this new structure. In both approaches, however, the application embeds the behavior information within itself, thereby making that information inaccessible and unusable to other applications. Consequently, each application that parses the original XML object would need to define its own behavior for those structures which, in turn, is a replication of effort across the set of applications that will in fact access the XML object.

It would, therefore, be a significant advantage and improvement in the art to provide systems and methods of parsing of XML documents to produce an application-specific output structure, comprised of type-specific classes which contain behaviors unique to each class consistent with object-oriented concepts.

Summary of the Invention

To this end, an embodiment of the invention is a method of parsing an XML document. The method includes defining type-specific object classes and associating the type-specific object classes with the XML document.

Another embodiment of the invention is a system of parsing an XML document. The system includes a computer capable of receiving the XML document, a code for operating the computer, means for calling the code, and a class declaration locatable by the code.

Yet another embodiment of the invention is a method of parsing an XML document. The method includes acquiring the XML document, associating the XML

document with a call, calling a code, and creating a type specific object from the XML document because of the code.

Another embodiment of the invention is a method of generating type-specific objects from XML. The method includes calling a code that operates on XML, processing the code, locating type-specific class associations, locating the type-specific class code via the step of processing, acquiring the type-specific class code via the step of processing, and parsing the XML to obtain the type-specific objects, the step of parsing being dictated by the type-specific class declarations from the step of locating and according to a result of the step of processing.

Yet another embodiment of the inventions is a method of generating type-specific objects from a generic object. The method includes creating an XML document, defining type-specific object classes corresponding to the type-specific objects, associating the type-specific object classes with the XML document, parsing the XML document to instantiate the type-specific object classes, and obtaining the type-specific objects.

Brief Description of the Drawings

Fig. 1 is a flow diagram of a method of instantiation of type-specific objects by parsing XML documents, according to embodiments of the invention.

Fig. 2 is a system for performing the method of Fig. 1, according to embodiments
5 of the invention.

Detailed Description

Referring to Fig. 1, a method 10 of creating type-specific objects from XML documents is commenced with a step 12 of creating an XML document. As those skilled in the art will know and appreciate, Extensible Markup Language (XML) is a formal
10 recommendation from the World Wide Web Consortium (W3C) of a language for programming Web pages or other structuring of information. The language contains markup symbols to describe the contents of a page, file, or other information. XML describes the content of the page, file, or other information in terms of what data is being described. Therefore, an XML file can be processed purely as data by a program or it can
15 be stored with similar data or it can be displayed. Programming to create the XML document in the step 12 generally follows the formats and arrangement proposed in the formal recommendation to W3C.

In a step 14, object classes are defined. As those skilled in the art will know and appreciate, an object class, in object-oriented programming, is a template definition of the
20 methods and variables in a particular kind of object. The object classes defined in the step 14 are the type-specific objects which are to be instantiated by parsing of the XML document created in the step 12. The object classes are user-designated, according to the

user's desired object definitions and the particular object-oriented programming language chosen by the user and the application in which the type-specific objects are to be applied. For example, if the user is programming in the Java™ language, then the object classes will be the user-defined Java™ object classes, and these will be the defined object classes in the step 14. By so defining the object classes in the step 14, the object classes correspond to object classes for other applications (e.g., such as other programs, like a Java™ program), in addition to being type-specific object classes which will be derived from the XML document.

The object classes defined in the step 14 are type-specific object classes. In other words, the object classes so defined in the step 14 are the same object classes that are defined for other applications in object-oriented environments. The object classes defined in the step 14 are, thus, defined as the specific data objects that are desired from the information contained in the XML document. In contrast to past practices, conventionally object classes with respect to XML documents have been generic "Elements". The generic Elements allow parsing to yield a parse tree, distinguishing the outline structure of the XML document. However, such parsing to instantiate generic Elements does not yield specific data related to the information contents of the XML document. The result is merely generic information about the structure of the XML document, such as page, header, and paragraph outline arrangement (but not the specific, unique information contained in the pages, headers, and paragraphs, or in other specific features of the document). Contrasting the step 14, the object classes defined in the step

are type-specific object classes corresponding to type-specific object classes of an object-oriented program or other environment in which specific information contained in the XML document is to be used.

In a step 16, the object classes defined in the step 14 are associated with the XML document. The association in the step 16 may be by any of a variety of mechanisms for making such association. For instance, a document type definition (DTD) document is often created to accompany XML documents and can be created in a manner so as to provide the object classes association in the step 16. In conventional practices, the DTD is a specification that follows the rules of the Standard Generalized Markup Language (SGML). This DTD specification according to SGML rules accompanies a document and identifies what the codes (or markup) are that generically separate paragraphs, identify topic headings, and other generic features of the document. With respect to conventional creation of XML documents, a DTD has not always been prepared by the XML document creator and, even when it has been prepared, it does not associate type-specific object classes with the documents. The SGML rules do not provide a means to associate type-specific objects.

The association step 16 of the method 10 associates type-specific object classes (not merely generic classes) with the XML document. The step 16 achieves this because the association made is with and between the type-specific object classes defined in the step 14 and the XML document created in the step 12. It is evident that the conventional DTD specification according to the SGML rules does not provide the type-specific object

classes association. However, by extending the DTD specification, in accordance with the present invention, to include some tags or elements representing the desired type-specific object classes from the step 14, the type-specific object classes are associated in the step 16 with the XML document via the representation in the DTD specification for the XML document.

In a step 18, a parse is performed of the XML document having the associated extended DTD specification with elements for type-specific object classes. The parse step 18 may be thought of as (a) performing a parse or break (i.e., 18a) of the parts of the XML document according to the particular type-specific object classes indicated by the associated extended DTD specification and (b) instantiating the type-specific object classes (i.e., 18b) for the data of the XML document. The result of the parse step 18 is, therefore, instantiated type-specific objects from the XML document. The instantiated type-specific objects are useable by other applications in which object-oriented data from the XML document is desired. An example situation in which the instantiated type-specific objects are useable is in a Java™ computer program that operates with the particular information contained in the XML document (not just the outline configuration of the XML document) which has been instantiated through the parse step 18 as the type-specific objects.

Although the association step 16 can be performed as described above using the extended DTD specification, the association step 16 can alternatively be performed in other manners, such as in stylesheet, in a remote repository, by local class declarations

used to override default class declarations, or others. Two particular other possibilities for the association step 16 are embedding of the location of class declarations in the XML document itself or relating to the XML document some relational database containing the location. If the location of class declarations are embedded, the creator of the XML

5 document must, during the step 12 of creating the XML document (or at some other point in modification of the document), incorporate in the XML document itself the tags for the type-specific object classes. One type of tags in XML programming is referred to as XML elements. In the step of creating 12, the programmer creator of the XML document associates the XML element with the type-specific object classes defined in the step 14, 10 for example, a specific Java™ class or another class. In such an instance, the steps 12 and 14 of the method 10 can be reversed in sequence, performed concurrently, or otherwise performed in a manner other than as shown in the sequence of Fig. 1. In any event, the result of the steps 12 and 14 of the method 10 is an XML document that includes XML elements that are associated in the step 16 with type-specific object classes and that 15 ultimately after parsing in the step 18 yield type-specific objects for use in object-oriented programs and environments.

In the second alternative possibility of associating the XML document with some database or other source, for example purposes herein, reference is made particularly to a relational database, the step 16 of associating involves querying the information available 20 in the relational database (or other source, as the case may be). The relational database includes the type-specific object class declarations from the step 14 for associating those

classes with the particular information of the XML document, depending on the desired scenario. As referenced herein, the term “class declaration” means any name or locator of the class or the code of the class itself. Where the type-specific object classes are associated with the XML document in such manner, parsing of the XML document according to those classes in the step 18 yields the type-specific objects from the XML document.

Other alternatives for associating in the step 16 the type-specific object classes from the step 14 and the XML document created in the step 12 include specialized files, programs, and other possibilities. Those skilled in the art will know and appreciate the wide variety of alternatives in these regards that are presently or in the future possible, all of which are included in the present invention.

Referring to Fig. 2, a system 40 for performing the method 10 (shown in Fig. 1) includes a computer 42. The computer 42 can be any of a wide variety of types and styles, and the term and identifier “computer”, as used herein, is intended in its broadest sense. For example and for purposes of explanation and description herein, the computer 42 is a personal computer that includes at least a memory, a processor, and a viewing monitor (these elements are commonly known and are not shown in detail). The computer 42 is capable of interpreting XML documents 46 received by or otherwise located at the computer 42.

XML documents can be received by the computer 42 from any of a variety of sources, however, a typical source for such documents, which serves as an example

herein, is a network 44, such as the Internet. The network 44 is communicatively connected to the computer 42. The XML documents received by the computer 42 are exemplified in Fig. 2 by the display on the viewing monitor of the computer 42, and are identified as XML document 46.

5 The XML document 46 is programmed generally in accordance with conventional XML programming practices. In embodiments of the invention in which the type-specific class declarations embedded within the XML document itself, XML elements or tags 50 (exemplified in phantom in Fig. 1, for example) for the type-specific classes are included with the XML document by the programmer. The XML elements 50 may
10 prescribe that on parsing, conversion be made into the type-specific class, for example, a Java™ or other OOPL class type. If the XML parser understands what the XML elements 50 mean or indicate, then the parse is dictated thereby; otherwise, the XML elements 50 are ignored by the parser.

Other embodiments of the invention achieve the type-specific class declarations
15 by extension of the DTD specification made by the programmer for the XML documents 46 of the computer 42. This extension of the DTD specification is exemplified in Fig. 1, in phantom, by the DTD file 48. In practice, the DTD file 48 accompanies the XML document 46 at the computer 42. Also, as has been mentioned, embodiments of the invention can also or alternatively achieve the type-specific declarations via use of a
20 relational database 52 (shown in phantom in Fig. 2) that provides the class objects for the XML document 46. The relational database 52 can be located at the computer 42 or

otherwise accessible to the computer 42 at another location, for example, internetworked with the computer 42 via the Internet or some other network 44.

In any event in the embodiments of the invention, the type-specific object classes instantiated by parsing of the XML document 46 are provided not by the parser, but
5 instead by a file, database, or other data associated with the XML document 46. As those skilled in the art will know and appreciate, such associated file, database, or other data can be located at and accessible from a wide variety of conventional sources, and future networking and information technology advances will no doubt allow additional and further possibilities for sources of such data. Furthermore, although the foregoing
10 description has primarily addressed concepts in which the type-specific object classes are supplied outside of the XML document 46 and the XML parser themselves, it is possible that the XML document and/or the parser can be hard coded or otherwise programmed or configured in such manner as to provide, at least in part, the desired parsing result and other parts of the desired parsing can be achieved through the concepts herein.

15 For purposes of illustration and not by way of limitation, the following examples demonstrate possible results and consequences of the invention:

Examples

First, an example is presented of a conventional parse of an XML document having the file name donne.xml; then, an example of a type-specific parse of the XML
20 document according to embodiments of the present invention.

Conventional Parse:

When an XML parser generates a parse tree for this document, the resulting tree looks as follows in Lark v.1.0. Lark is a conventional, widely available, non-validating XML parser implemented in the Java™ language. Similar parsers would yield substantially the same parse tree result in conventional operations.

```

5      root  | -> Element | -> Element | -> Element
           |             | -> Element
           |             | -> Element | -> Element
           |
10      | -> Element | -> Element { | -> Element } *
           | -> Element { | -> Element } *
           | -> Element { | -> Element } *
           | -> Element { | -> Element } *

```

15 The Element entries in the above tree are the objects created by the conventional XML parser, such as the Lark parser. These Element entries correspond to the Element Declarations in the XML document, as conventionally designed. To determine what is each Element, i.e., what is the data content, characteristics, and so forth of the Element, an application operating with the XML document must necessarily navigate the tree

20 structure and inspect each Element object using a generic API. This requires at least that the application have knowledge of how to navigate and operate with the structure. In order for successful navigation, therefore, the application must be coded specifically for navigating and operating with the structure. This is problematic in relation to object-oriented concepts because each and every application that wants to access any such

25 Element object of the XML document will likewise require particular coding that provides the necessary knowledge and navigability of the tree structure. The Element objects of the conventional parse tree of the XML document can, therefore, be considered

as “generic” (i.e, rather than “type-specific”) because the objects merely characterize general, structure characteristics of the XML document (i.e, not specific information of characteristics of contents and other details of objects).

With only the generic `Element` objects of the parse tree resulting from the parse,
5 specific, unique code is required with any application in order to obtain the data information and characteristics of the generic `Element` objects. For example, merely to retrieve the title of the document requires code something like the following:

```
10  Element front = null;  
    Vector v = root.children();  
    if (v != null) {  
        Element front = v.elementAt(0); // v(0) "should"  
        // be the front element, we hope  
        if (front != null)  
15         v = front.children();  
        for (i=0; i < front.size(); i++) {  
            Element child = v.elementAt(i);  
            if child.type().equals("title")  
                return child.content();  
20         }  
    }  
    }  
    return null;
```

25 Thus, specific and unique hard-coding in each application is required where use of the XML document information is desired.

Type-Specific Parse:

If the output of the parser was instead a type-specific structure (i.e, rather than merely the generic `Element` objects of the parse tree above), applications could operate

on the type-specific objects, in typical object-oriented fashion, without the necessity of unique and specific hard-coding in applications in order to extract the desired information. Type-specific structure, for example, which coincides with the definition of the structure in the XML document and having resulting objects containing the type-specific behavior for each specific element type parsed, can be achieved from the parse by the methods and systems of embodiments of the invention herein, as shown in the following. The following assumes that the XML document, having file name `donne.xml`, is a poem, and that the important information and other characteristics of the document which are desirably treated as objects are the general features of any poem, such as the poem itself, the title, author, revision history, stanzas, and so forth.

Within a type-specific parse tree class appropriate to the particular XML document of interest, like a type-specific class `poem` for purposes of this example, there can be code which understands how to extract the parsed information. (As alternatives to such code, the parser could use separate instantiation directives or other mechanisms, or the parser itself can be extended so that, if there is a one to one correlation of structure between the XML structure and the class structure, then the parser could instantiate it directly. However, only the type-specific class code-based extraction is specifically described in this example.) In effect, the object understands how to investigate itself, so the code can allow desired type-specific (versus generic) extraction via the parse. This code is provided by the object type creator, for example, the creator of the XML document who knows the particular type-specific objects, such as the class `poem` of the

XML document (rather than with generic `Element` classes as would be extracted from the conventional parse operation), which would be important for other object-oriented applications. The code so created accompanies the object as a means to facilitate re-objectifying the XML back into an object. This enables reuse of the object by any
5 application. The `poem` class, then, if it is itself instantiated, also provides a poem-specific interface.

In the example, the `Element` class is related to code created by the object type creator. In this case, the code is exemplified by a method `process()`. The method can be called, i.e., the code is run, once an element has been parsed. In each
10 implementation, for example within the `poem` class, the `process()` code handles extracting the data from the inherited generic structures of the `Element` class.

Alternatively, `poem` methods can simply be written that do this directly. But, it is important to note that the object itself is doing this, and further, that no other parse trees or duplicate structures have been constructed.

15 In conventional operations, when the parser sees an XML element declaration, the parser instantiates a generic `Element` object (with `Element` only related methods).

The extension which calls the coded method `process()` simply extends the behavior of the parser so that instead of instantiating generic `Element` objects, it instantiates type-specific ones. So when the parser encounters a new element declaration, it looks for a
20 *class declaration* which identifies which class to instantiate in lieu of a generic `Element` class object. For example, when the parser identifies the "poem" element declaration, it

looks for a class declaration for poem. If it finds one, it instantiates an object of that class rather than a generic Element object. The poem class extends the interface of the generic Element class, but in addition, adds type-specific methods relevant to a poem object.

In a particular instance of implementation of the foregoing concept, locations of the class declarations are embedded in the DTD file for the XML document, along with the declaration of the structure of the XML file. In such an instance, one of the class declarations can look like the following for the poem example above (although there are numerous ways, in keeping with the invention, to implement the concept):

```
<!ENTITY Poem-Class "http://www.objs.com/xml/poem/com.objs.ia.specification.xml.poem">
<!ENTITY Front-Class "http://www.objs.com/xml/poem/com.objs.ia.specification.xml.front">
<!ENTITY Body-Class "http://www.objs.com/xml/poem/com.objs.ia.specification.xml.body">
...
<!ENTITY ClassSuffix "-Class">
```

The ClassSuffix is used to avoid possible naming duplications (which may be solved otherwise using the XML namespaces proposal). So, when a new element declaration is identified by the parser, the parser inspects this list looking for an entry matching the pattern <element type><ClassSuffix>, or in the case of the poem element declaration,

"Poem-Class".

The resulting parse tree for the example above would look like:

```

root  |-> poem      |-> front      |-> title
      |             |             |-> author
      |             |             |-> revision-history |-> item
      |             |-> body      |-> stanza
      |             |             |-> stanza
```

```
| -> stanza  
| -> stanza
```

where poem, front, body, title, author, revision-history, and
5 stanza are all classes with type-specific behavior. Because of the type-specific
structure of the parse tree and its elements, one can simply write the following to obtain
the object that is the poem title:

```
poem.getTitle();
```

10 In this manner, the type-specific parse tree structure, possible because of the association
with the XML document of the coded class declarations, provides type-specific behaviors
to the data contents of the XML document according to the particular object types that are
declared.

15 It is to be understood that multiple variations, changes and modifications are
possible in the aforementioned embodiments of the invention. Although illustrative
embodiments of the invention have been shown and described, a wide variety of
modification, change and substitution is contemplated in the foregoing disclosure and, in
some instances, some features of the present invention may be employed without a
20 corresponding use of the other features. Accordingly, it is appropriate that the foregoing
description be construed broadly and understood as being given by way of illustration and
example only, the spirit and scope of the invention being limited only by the appended
claims.

What is Claimed is:

1. A method of parsing an XML document, comprising the steps of:
defining type-specific object classes; and
associating the type-specific object classes with the XML document.
2. A system of parsing an XML document, comprising:
a computer capable of receiving the XML document;
a code for operating the computer;
means for calling the code; and
a class declaration locatable by the code.
3. A method of parsing an XML document, comprising the steps of:
acquiring the XML document;
associating the XML document with a call;
calling a code; and
creating a type specific object from the XML document because of the
code.
4. A method of generating type-specific objects from XML, comprising the
steps of:
calling a code that operates on XML;
processing the code;
locating type-specific class associations;

6 locating the type-specific class code via the step of processing; acquiring
7 the type-specific class code via the step of processing;
8 parsing the XML to obtain the type-specific objects, the step of parsing
9 being dictated by the type-specific class declarations from the step of locating and
10 according to a result of the step of processing.

1 5. A method of generating type-specific objects from a generic object,
2 comprising the steps of:
3 creating an XML document;
4 defining type-specific object classes corresponding to the type-specific
5 objects;
6 associating the type-specific object classes with the XML document;
7 parsing the XML document to instantiate the type-specific object classes;
8 and
9 obtaining the type-specific objects.

1 6. The method of claim 1, wherein the association is selected from
2 the group consisting of explicit association and implicit association.

3 7. The method of claim 6, wherein the explicit association is by specification
4 via the XML document or a DTD of the XML document.

5 8. The method of claim 6, wherein the implicit association is by publication
6 of type-specific classes, locators, or links to the Internet, a database, or a query engine.

11

A method of parsing XML creates type-specific objects for object-oriented applications. The method includes acquiring the XML, associating the XML with a call, calling a code, and creating a type-specific object from the XML because of the code. The association may be implicit or explicit. The type-specific object is an object-oriented object, for example, a JavaTM object, a C⁺⁺ object, or some other object-oriented programming language class.

1945-1946
 1947-1948
 1949-1950
 1951-1952
 1953-1954
 1955-1956
 1957-1958
 1959-1960
 1961-1962
 1963-1964
 1965-1966
 1967-1968
 1969-1970
 1971-1972
 1973-1974
 1975-1976
 1977-1978
 1979-1980
 1981-1982
 1983-1984
 1985-1986
 1987-1988
 1989-1990
 1991-1992
 1993-1994
 1995-1996
 1997-1998
 1999-2000
 2001-2002
 2003-2004
 2005-2006
 2007-2008
 2009-2010
 2011-2012
 2013-2014
 2015-2016
 2017-2018
 2019-2020
 2021-2022
 2023-2024
 2025-2026
 2027-2028
 2029-2030
 2031-2032
 2033-2034
 2035-2036
 2037-2038
 2039-2040
 2041-2042
 2043-2044
 2045-2046
 2047-2048
 2049-2050
 2051-2052
 2053-2054
 2055-2056
 2057-2058
 2059-2060
 2061-2062
 2063-2064
 2065-2066
 2067-2068
 2069-2070
 2071-2072
 2073-2074
 2075-2076
 2077-2078
 2079-2080
 2081-2082
 2083-2084
 2085-2086
 2087-2088
 2089-2090
 2091-2092
 2093-2094
 2095-2096
 2097-2098
 2099-2100
 2101-2102
 2103-2104
 2105-2106
 2107-2108
 2109-2110
 2111-2112
 2113-2114
 2115-2116
 2117-2118
 2119-2120
 2121-2122
 2123-2124
 2125-2126
 2127-2128
 2129-2130
 2131-2132
 2133-2134
 2135-2136
 2137-2138
 2139-2140
 2141-2142
 2143-2144
 2145-2146
 2147-2148
 2149-2150
 2151-2152
 2153-2154
 2155-2156
 2157-2158
 2159-2160
 2161-2162
 2163-2164
 2165-2166
 2167-2168
 2169-2170
 2171-2172
 2173-2174
 2175-2176
 2177-2178
 2179-2180
 2181-2182
 2183-2184
 2185-2186
 2187-2188
 2189-2190
 2191-2192
 2193-2194
 2195-2196
 2197-2198
 2199-2200
 2201-2202
 2203-2204
 2205-2206
 2207-2208
 2209-2210
 2211-2212
 2213-2214
 2215-2216
 2217-2218
 2219-2220
 2221-2222
 2223-2224
 2225-2226
 2227-2228
 2229-2230
 2231-2232
 2233-2234
 2235-2236
 2237-2238
 2239-2240
 2241-2242
 2243-2244
 2245-2246
 2247-2248
 2249-2250
 2251-2252
 2253-2254
 2255-2256
 2257-2258
 2259-2260
 2261-2262
 2263-2264
 2265-2266
 2267-2268
 2269-2270
 2271-2272
 2273-2274
 2275-2276
 2277-2278
 2279-2280
 2281-2282
 2283-2284
 2285-2286
 2287-2288
 2289-2290
 2291-2292
 2293-2294
 2295-2296
 2297-2298
 2299-2300
 2301-2302
 2303-2304
 2305-2306
 2307-2308
 2309-2310
 2311-2312
 2313-2314
 2315-2316
 2317-2318
 2319-2320
 2321-2322
 2323-2324
 2325-2326
 2327-2328
 2329-2330
 2331-2332
 2333-2334
 2335-2336
 2337-2338
 2339-2340
 2341-2342
 2343-2344
 2345-2346
 2347-2348
 2349-2350
 2351-2352
 2353-2354
 2355-2356
 2357-2358
 2359-2360
 2361-2362
 2363-2364
 2365-2366
 2367-2368
 2369-2370
 2371-2372
 2373-2374
 2375-2376
 2377-2378
 2379-2380
 2381-2382
 2383-2384
 2385-2386
 2387-2388
 2389-2390
 2391-2392
 2393-2394
 2395-2396
 2397-2398
 2399-2400
 2401-2402
 2403-2404
 2405-2406
 2407-2408
 2409-2410
 2411-2412
 2413-2414
 2415-2416
 2417-2418
 2419-2420
 2421-2422
 2423-2424
 2425-2426
 2427-2428
 2429-2430
 2431-2432
 2433-2434
 2435-2436
 2437-2438
 2439-2440
 2441-2442
 2443-2444
 2445-2446
 2447-2448
 2449-2450
 2451-2452
 2453-2454
 2455-2456
 2457-2458
 2459-2460
 2461-2462
 2463-2464
 2465-2466
 2467-2468
 2469-2470
 2471-2472
 2473-2474
 2475-2476
 2477-2478
 2479-2480
 2481-2482
 2483-2484
 2485-2486
 2487-2488
 2489-2490
 2491-2492
 2493-2494
 2495-2496
 2497-2498
 2499-2500
 2501-2502
 2503-2504
 2505-2506
 2507-2508
 2509-2510
 2511-2512
 2513-2514
 2515-2516
 2517-2518
 2519-2520
 2521-2522
 2523-2524
 2525-2526
 2527-2528
 252

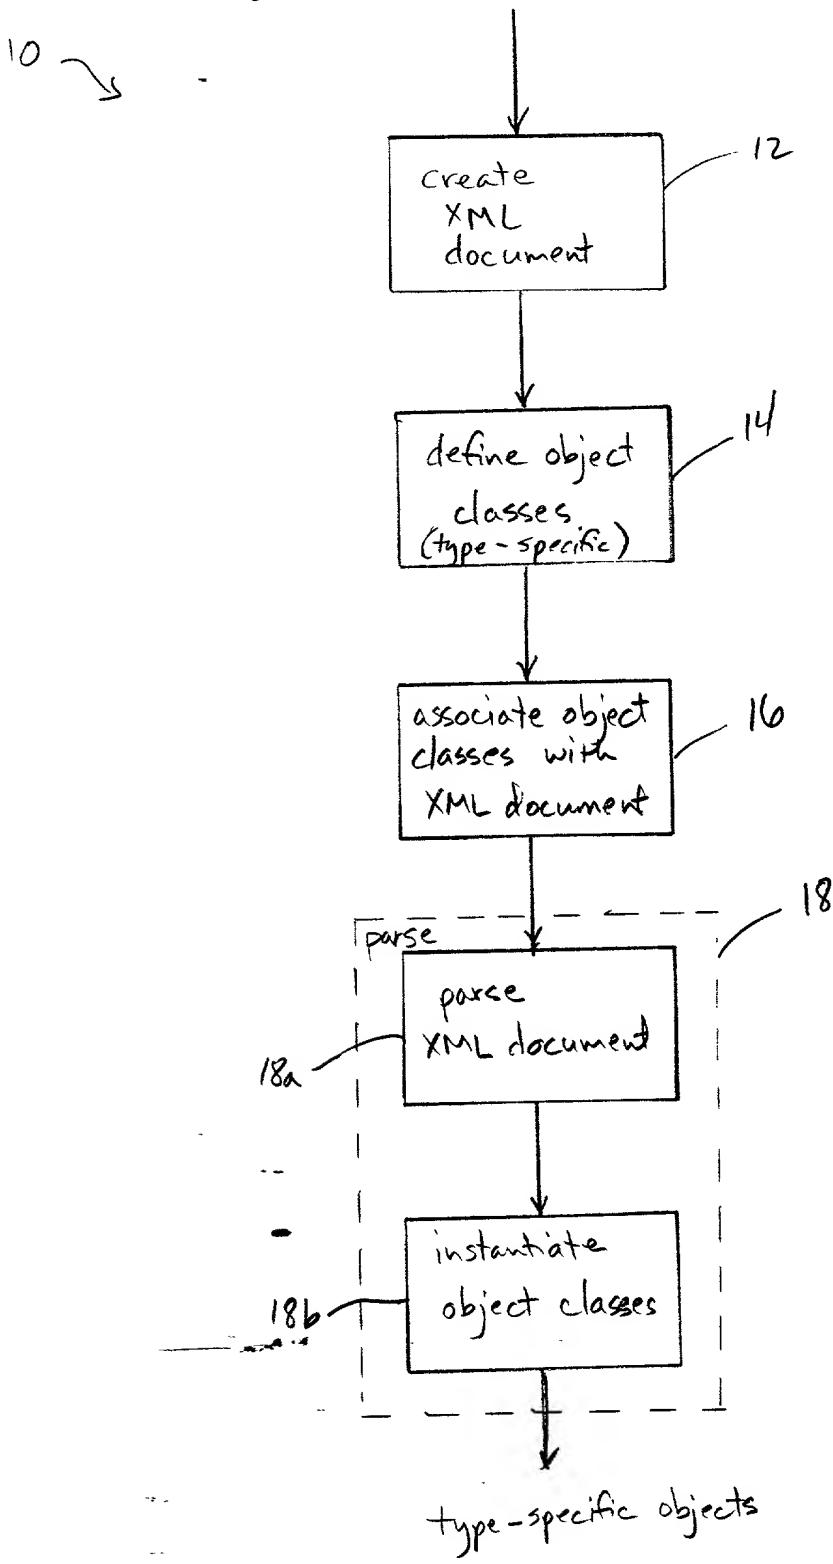


Fig. 1

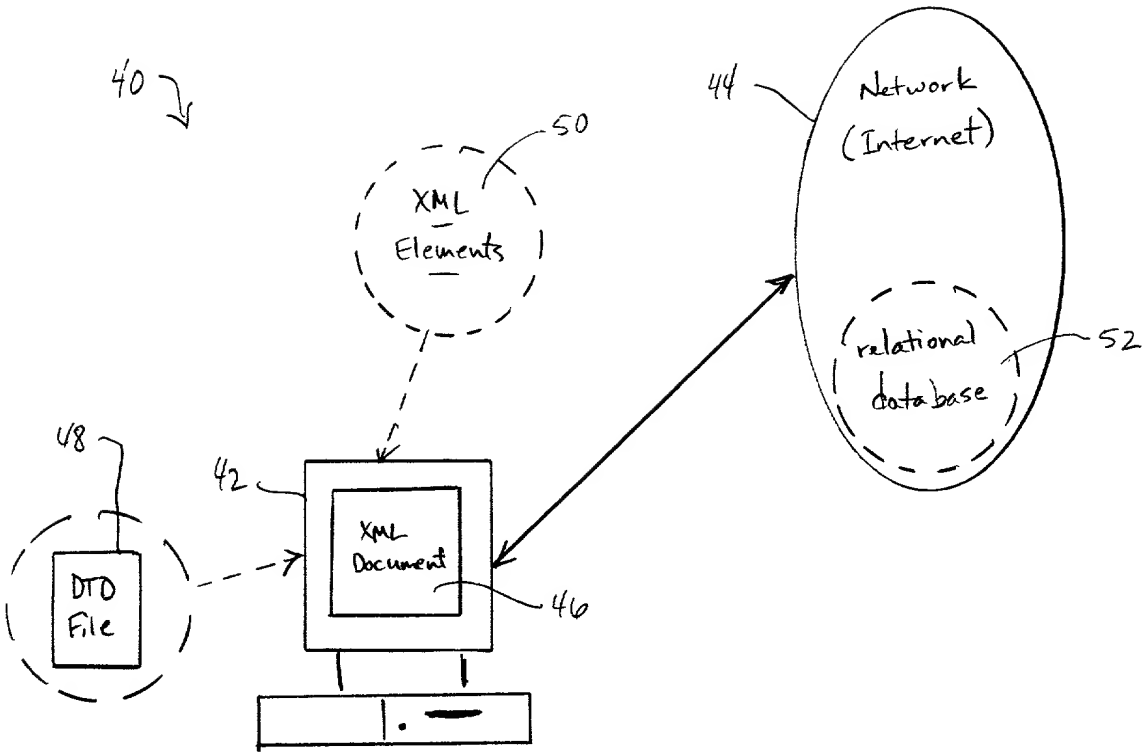


Fig. 2

COMBINED DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name;
and

I verily believe that I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled: **TYPE-SPECIFIC OBJECTS FROM MARKUP AND WEB-ORIENTED LANGUAGES, AND SYSTEMS AND METHODS THEREFOR**, the specification of which:

X is attached hereto

_____ was filed on _____ as Application Serial No. _____ and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with 37 CFR §1.56(a).

I hereby claim foreign priority benefits under 35 U.S.C. §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of any application on which priority is claimed:

Country	Number	Date Filed	Priority Claimed
_____	_____	_____	_____
_____	_____	_____	_____
_____	_____	_____	_____

I hereby claim the benefit under 35 U.S.C. §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of 35 U.S.C. §112, I acknowledge the duty to disclose material information as defined in 37 CFR §1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

Application Serial No.	Filing Date	Status (patented, pending)
_____	_____	_____
_____	_____	_____
_____	_____	_____
_____	_____	_____

I hereby appoint the following attorneys and/or agents to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith: H. DALE LANGLEY, Registration No. 35,927, JAMES D. BENNETT, Reg. No. 37,550; MICHAEL R. CANNATTI, Reg. No. 34,791; JAMES B. GAMBRELL, Reg. No. 17,920; DENNIS W. GILSTAD, Reg. No. 36,810; GARY W. HAMILTON, Reg. No. 31,834; MIRA L. HELMS, Reg. No. 43,668; H. DALE LANGLEY, Reg. No. 35,927; GLORIA L. NORBERG, Reg. No. 36,706; RUSSELL C. SCOTT, Reg. No. 43,103; ADAM D. SHEEHAN, Reg. No. 42,146; RICHARD J. SMITH, Reg. No. 30,496; PETE A. SMITS, Reg. No. 39,036; GARY R. STANFORD, Reg. No. 35,689; H. SHANNON TYSON, JR., Reg. No. 42,193.

Address all telephone calls and correspondence to:

H. Dale Langley, Jr.
 AKIN, GUMP, STRAUSS, HAUER & FELD, L.L.P.
 1900 Frost Bank Plaza
 816 Congress Avenue
 Austin, Texas 78701
 Telephone: (512) 499-6200
 Telecopier: (512) 499-6290

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

2025 RELEASE UNDER E.O. 14176

1	Full Name Paul Pazandak	Inventor's Signature	Date
	Residence 809 East 102 nd Street Bloomington, MN 55420-5409	Citizenship U.S.	
	Post Office Address 809 East 102 nd Street Bloomington, MN 55420-5409		
2	Full Name	Inventor's Signature	Date
	Residence	Citizenship U.S.	
	Post Office Address		
3	Full Name	Inventor's Signature	Date
	Residence	Citizenship U.S.	
	Post Office Address		
4	Full Name	Inventor's Signature	Date
	Residence	Citizenship	
	Post Office Address		